


LOC/DME I-GEQ 110.5 Chan 42	APP CRS 270°	Rwy Idg TDZE 581 Apt Elev 590
--	------------------------	---

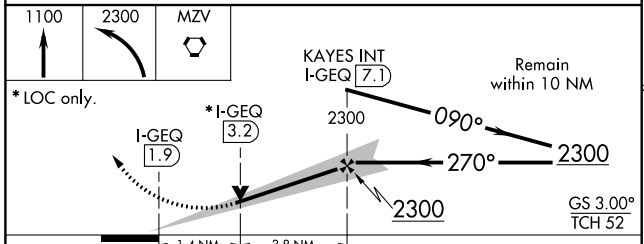
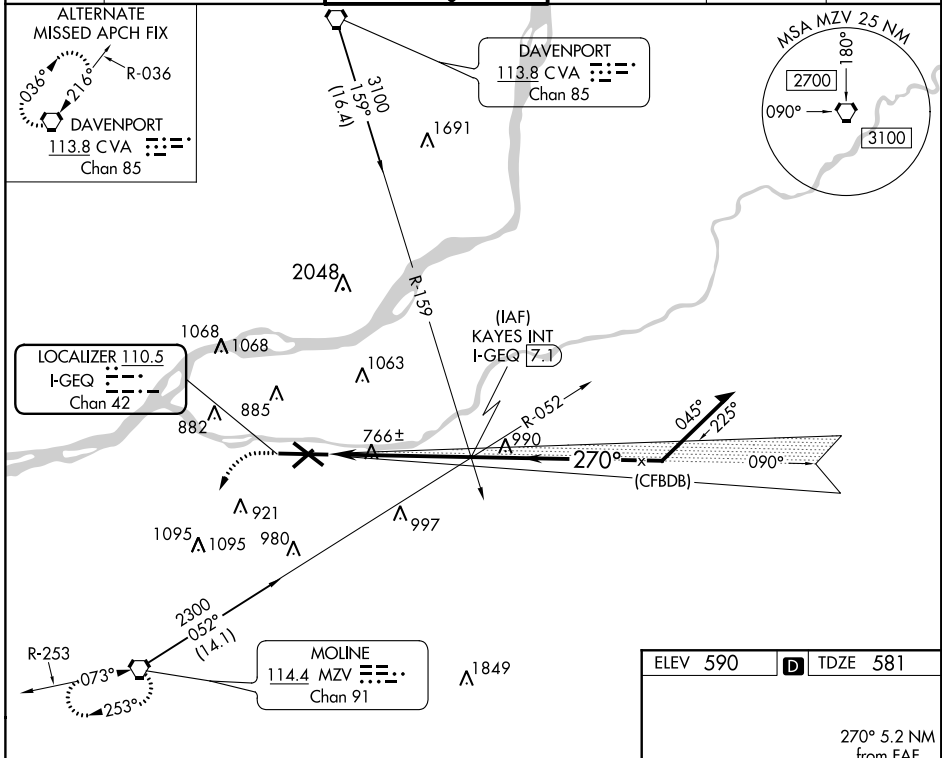
ILS or LOC RWY 27

QUAD CITY INTL (MLI)

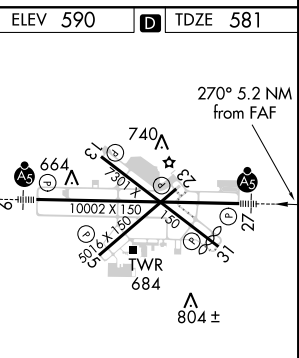
⚠ Circling to Rwy 05/13/23 NA at night. When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet, increase S-LOC-27 and Circling Cat C/D visibility ¼ mile.
**** 1800 RVR authorized with use of FD or AP or HUD to DA.**

MALSR

MISSED APPROACH: Climb to 1100, then climbing left turn to 2300 direct MZV VORTAC and hold.

ATIS 121.2	QUAD CITY APP CON * 125.95 257.8	QUAD CITY TOWER * 119.4 (CTAF) 0 269.55	GND CON 121.9 257.8	CLNC DEL 124.05	UNICOM 122.95
----------------------	--	---	-------------------------------	---------------------------	-------------------------



CATEGORY	A	B	C	D
S-ILS 27	** 781/24 200 (200-½)			
S-LOC 27	1060/24 479 (500-½)	1060/40 479 (500-¾)	1060/50 479 (500-1)	
CIRCLING	1140-1 550 (600-1)	1140-1½ 550 (600-1½)	1260-2 670 (700-2)	



HIRL Rws 9-27 and 13-31					
MIRL Rwy 5-23					
REIL Rws 13 and 31					
FAF to MAP 5.2 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

EC-3, 20 JUL 2017 to 17 AUG 2017

EC-3, 20 JUL 2017 to 17 AUG 2017