WAAS CH 42515 W13A	APP CRS 126°	Rwy Idg 7032 / TDZE 590 / Apt Elev 590

RNAV (GPS) RWY 13

QUAD CITY INTL (MLI)

T Baro-VNAV NA when using Davenport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
A Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C and D, and Circling Cats C and D visibility ¼ mile. Night landing: Rwy 5 NA.

MISSED APPROACH: Climb to 3000 direct ARACI and via track 195° to MIGNE and via track 275° to MZV VORTAC and hold.

ATIS	QUAD CITY APP CON ★	QUAD CITY TOWER ★	GND CON	CLNC DEL	UNICOM
121.2	125.95 257.8	119.4(CTAF) L 269.55	121.9	124.05	122.95

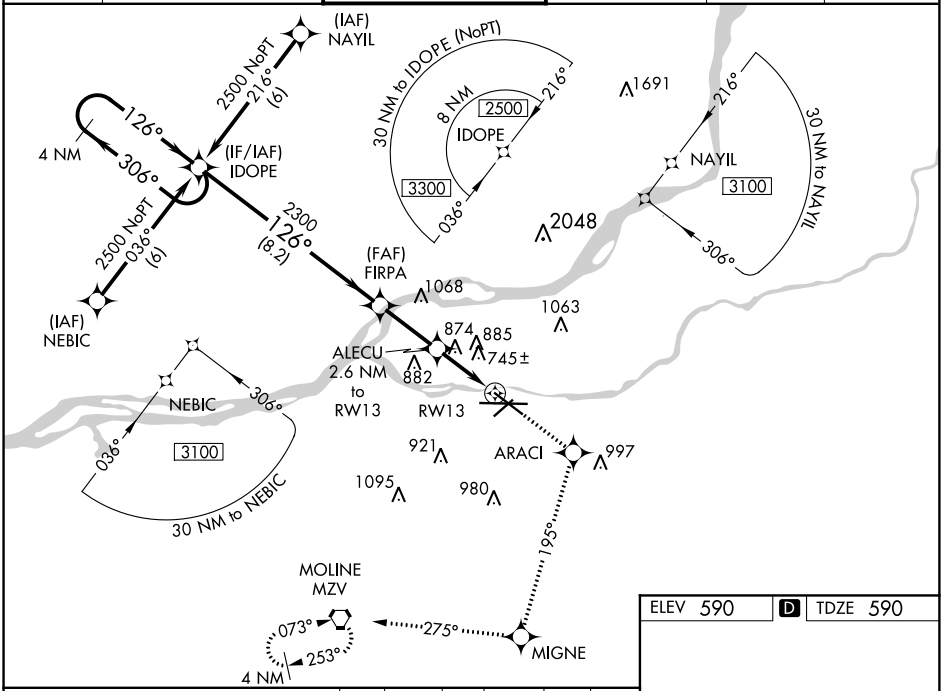

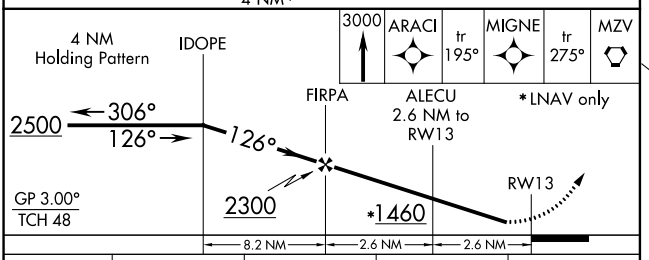

CATEGORY	A	B	C	D
LPV DA	908-1 318 (400-1)			
LNAV/VNAV DA	1292-2½ 702 (800-2½)			
LNAV MDA	1140-1 550 (600-1)		1140-1½ 550 (600-1½)	1140-1¾ 550 (600-1¾)
CIRCLING	1140-1 550 (600-1)		1140-1½ 550 (600-1½)	1260-2 670 (700-2)

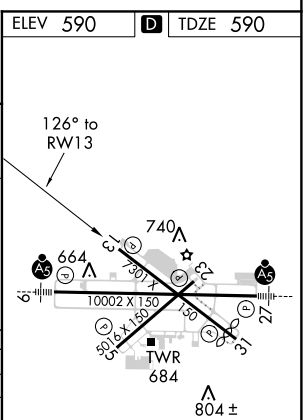

EC-3, 07 DEC 2017 to 04 JAN 2018
EC-3, 07 DEC 2017 to 04 JAN 2018