ILS or LOC/DME RWY 13

ST CLOUD RGNL (STC)

LOC I-BPM	APP CRS	Rwy Idg	7500
111.9	133°	TDZE	1031
		Apt Elev	1031

Circling to Rwy 5-23 NA at night. DME from STC VOR/DME. Simultaneous reception of I-BPM and STC DME required. DME required. When local altimeter setting not received, use Little Falls altimeter setting and increase DA to 1307 and all MDAs 80 feet. Increase S-LOC 13 Cats C/D and Circling Cats C/D visibility ¼ mile. For inoperative MALSR when using Little Falls altimeter setting, increase S-ILS 13 all Cats visibility ½ mile.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and via STC VOR/DME R-312 to SIYON/AXN VOR/DME 41.6 DME and hold.

ATIS	MINNEAPOLIS CENTER	ST. CLOUD TOWER ★	GND CON	PRINCETON RADIO	UNICOM
119.375	121.05 397.9	118.25 (CTAF) L	123.75	122.5	123.5

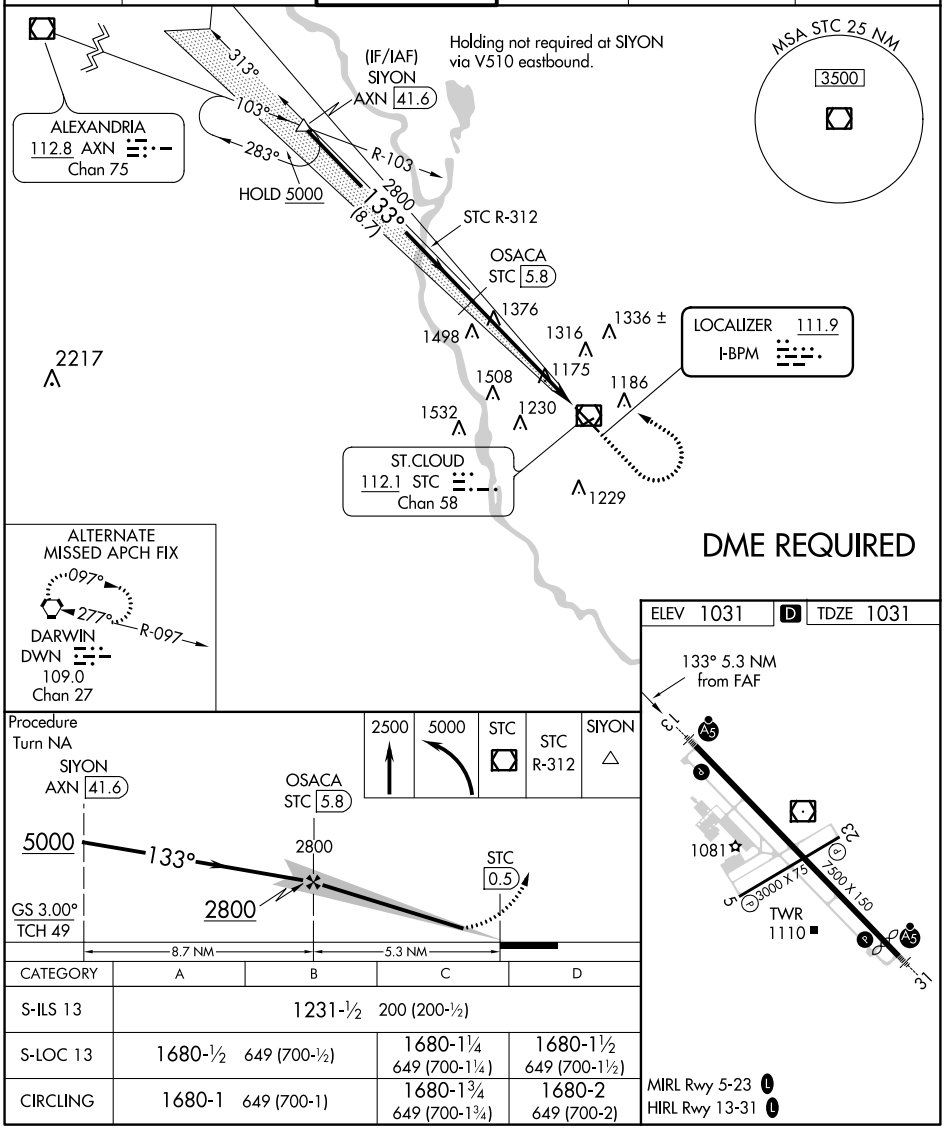

CATEGORY	A	B	C	D
S-ILS 13	1231-½ 200 (200-½)			
S-LOC 13	1680-½ 649 (700-½)		1680-1¼ 649 (700-1¼)	1680-1½ 649 (700-1½)
CIRCLING	1680-1 649 (700-1)		1680-1¾ 649 (700-1¾)	1680-2 649 (700-2)

MIRL Rwy 5-23 L
HIRL Rwy 13-31 L

NC-1, 23 MAY 2019 to 20 JUN 2019
NC-1, 23 MAY 2019 to 20 JUN 2019