

WAAS CH <b>99328</b> <b>W30A</b>	APP CRS <b>295°</b>	Rwy Idg TDZE <b>958</b> Apt Elev <b>961</b>	<b>3707</b> <b>958</b> <b>961</b>
--	------------------------	---	---

# RNAV (GPS) RWY 30

AIRLAKE (LVN)


RNP APCH.

**⚠** Baro-VNAV and VDP NA NA when using Minneapolis-St Paul Intl/Wold-Chamberlain altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 37°C. When local altimeter setting not received, use Minneapolis-St Paul Intl/Wold-Chamberlain altimeter setting: increase LPV DA to 1210 feet; increase LNAV/VNAV DA to 1298; increase all MDAs 60 feet. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV all Cats visibility to 1 SM. For inop ALS when using Minneapolis-St Paul Intl/Wold-Chamberlain altimeter setting, increase LNAV/VNAV all Cats visibility to 1, and LNAV Cat A/B to 1. Inoperative table does not apply to LPV. Rwy 30 helicopter visibility reduction below ¾ SM NA. When Circling to Rwy 12 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.


MALSR

MISSED APPROACH: Climb to 3000 direct JUNTU and hold.

AWOS-3 <b>118.0</b>	MINNEAPOLIS APP CON <b>134.7 284.7</b>	CLNC DEL <b>118.95</b>	UNICOM <b>123.0 (CTAF)</b>
------------------------	---	---------------------------	-------------------------------

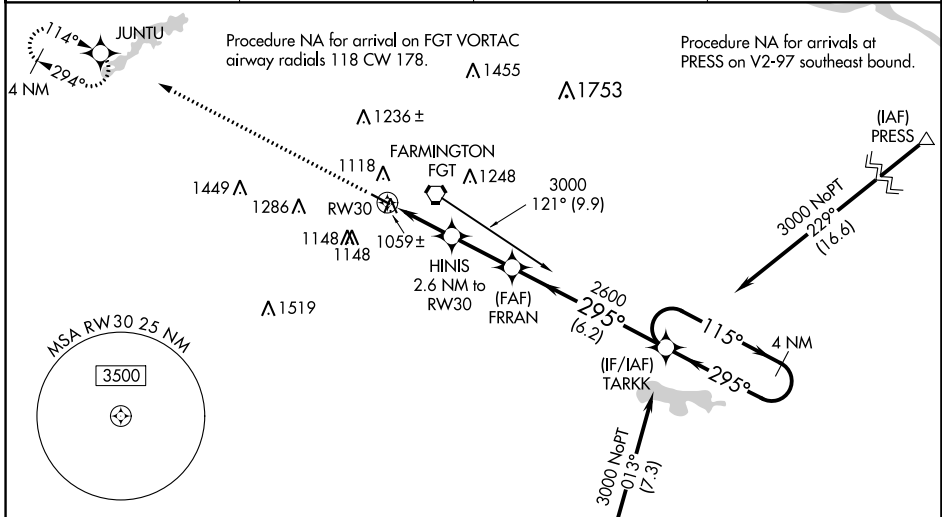

ELEV 961	<b>D</b>	TDZE 958
----------	----------	----------

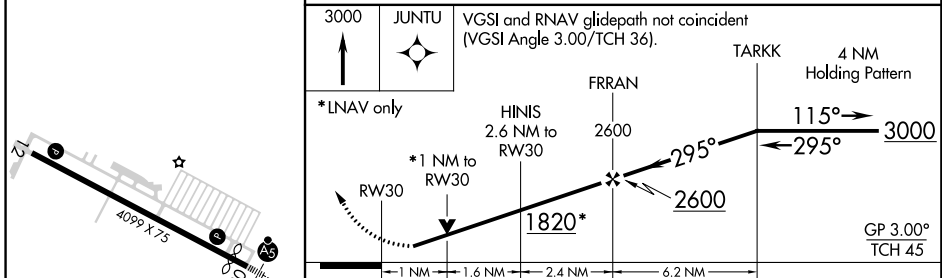

CATEGORY	A	B	C	D
LPV DA		1158-¾	200 (200-¾)	
LNAV/VNAV DA		1246-¾	288 (300-¾)	
LNAV MDA		1320-¾	362 (400-¾)	
<b>C</b> CIRCLING	1460-1	499 (500-1)	1660-2 699 (700-2)	1700-2¼ 739 (800-2¼)

NC-1, 23 MAY 2019 to 20 JUN 2019

NC-1, 23 MAY 2019 to 20 JUN 2019